


## UV-Integrator 126

The UV-Integrator 126 is a high quality UV measuring instrument. It is used to measure UV energy of different light sources, especially on printing machines. It is ideal to ensure quality control of printing and drying processes.

Small size, heavy duty pass-through Integrator . It is reliable and simple to use.

The UV-Integrator 126 is available in six different measuring ranges\*:  
(Please state upon order)

Item 10.1 UV-Integrator 126, Type 1 Diazo	350 – 460 nm
Item 10.2 UV-Integrator 126, Type 2 UV-A	315 – 410 nm
Item 10.3 UV-Integrator 126, Type 3 UV	250 – 410 nm (STD)
Item 10.4 UV-Integrator 126, Type 4 UV-B	280 – 315 nm
Item 10.5 UV-Integrator 126, Type 5 UV-C	230 – 280 nm
Item 10.6 UV-Integrator 126, Type 6 UV-V	395 – 445 nm

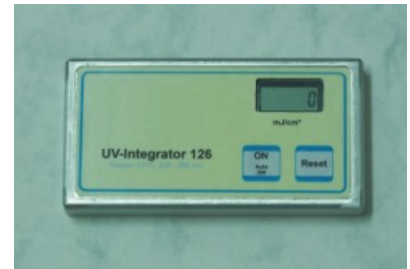

\*further spectral ranges available upon request


By addition of the incidence of the light quantities during the exposure cycle, relative values are calculated.

Because of uneven radiation distribution of the UV light source and different type of construction of the measuring devices by different manufacturers, different readings may appear under the same measurement conditions.

### Technical Data:

Spectral range:	UV 250 – 410 nm
Measuring range:	0 to 5,000 mW/cm <sup>2</sup>
Display:	6-digit LCD
Display range:	0 to 999,999 mJ/cm <sup>2</sup>
Power source:	long life 3.6 V Lithium Battery
Power consumption:	100 µA
Battery service life:	10,000 hrs
Dimensions:	4.5" x 2.4" x 0.5" (115 x 60 13 mm)
Weight:	approx. 8.8 ounce (250 g)
Temperature range:	0 to 45° Celsius
Heat protection:	Heat shield on back plate
Base Accuracy:	± 5 %

In the standard version it is measuring an integral in the spectral range from 250-410 nm, with a peak at the area of 330 nm.



While on the conveyer belt, the UV-Integrator 126 can withstand max. 110° Celsius for up to 10 seconds. The temperature of the housing should not exceed 45° Celsius.

### Calibration:

In order to keep its full function and precision it is recommended to have re-calibration done once per year. Re-calibration will also be necessary after change of battery. Ongoing, PTB traceable calibration with certificate

**Warranty:** 2 years from the date of purchase, for the German quality battery we guarantee one year

Subject to change without prior notice © 2014-01

UV-DESIGN (Office)  
Triebstrasse 3  
63636 Brachtal  
GERMANY  
Tel.: +49 (0)6053 619824  
Fax: +49 (0)6053 619820

(Office & Workshop) UV-DESIGN  
Fabrikstrasse 12  
63636 Brachtal  
GERMANY  
Tel.: +49 (0)6053 8095431  
Fax: +49 (0)6053 8095433