

## UV-3C-T Microlog 10 SD

(also available for LED measurement up to 20 W/cm<sup>2</sup>)

- + extra flat 10 mm / .4 inches
- + UV-A intensity mW/cm<sup>2</sup> + UV-A dose mJ/cm<sup>2</sup>
- + UV-B intensity mW/cm<sup>2</sup> + UV-B dose mJ/cm<sup>2</sup>
- + UV-C intensity mW/cm<sup>2</sup> + UV-C dose mJ/cm<sup>2</sup>
- + \*UV-V intensity mW/cm<sup>2</sup> + UV-V dose mJ/cm<sup>2</sup>
- + Full UV intensity mW/cm<sup>2</sup> + Full UV dose mJ/cm<sup>2</sup>
- + Permanent or triggered recording\*
- + temperature measuring
- + SD Memory Card
- + graphical and numerical display on a PC
- + re-chargeable accu cell
- + further spectral ranges upon request
- + available up to 20W/cm<sup>2</sup>
- + available with high speed sampling rate 0.0007s (1400/s)



The **UV-3C-T Microlog 10 SD with SD Memory card** is a self-contained, high quality UV measuring instrument. It is designed to measure, record and display peak UV intensity, UV dosage and temperature in the UV curing process.

It is equipped with three different UV sensors and one temperature sensor for the individual measuring of

UV-A 315 – 410 nm  
UV-B 280 – 315 nm  
UV-C 230 – 280 nm  
UV - 230 – 410 nm  
Temp 0 to 230° F / 0 to 110° C

With these three different UV-bands plus the total UV band and an extra temperature measuring, most of the measuring requirements of UV curing applications can be covered.

Due to its three different UV sensors and the integrated microprocessor the **UV-3C-T Microlog 10 SD with SD Memory card** can measure, record and display the peak of the UV-intensity (mW/cm<sup>2</sup>) for each UV-band individually plus the peak of total UV energy.

Additionally, this UV-Integrator is calculating the UV-dosage (mJ/cm<sup>2</sup>) of the UV energy supplied during the time of exposure of one measuring cycle. The UV-dosage is calculated for each UV-band (UV-A, UV-B and UV-C) individually and as total Integral of UV-dosage over all three UV-bands.

This allows to determine not only the total energy, but also how that energy is delivered, i.e., what intensity and dose at what UV-band.

An extra sensor measures temperatures from 0 to 230° F / 0 to 110° C

\*The **UV-3C-T Microlog 10 SD with SD Memory card** features a selectable „triggered mode“, i.e. the recording of the measuring starts first if the incident UV-intensity exceeds 2 mW/cm<sup>2</sup>.

The four sensors are on the back of the unit which also serves as a heat shield. After completion of the measuring cycle all measuring results can be scrolled through on the built in 2 x 16 digit LCD display.

A special AUTO-OFF feature that turns off the unit automatically after one minute serves as energy saving and extension of the battery service life.

This microprocessor integrator is additionally equipped with a Card Slot for the use of SD-Memory Cards. All measuring data of a measuring cycle are stored to the SD-Memory card with an identifying file name. The number of storable measuring files depends on the capacity of SD-Memory Card. Data can be loaded to a PC for further editing. The special evaluation software allows to show, edit and store a history of the measuring results of the entire measuring cycle as graphic charts (mW/cm<sup>2</sup>) and (mJ cm<sup>2</sup>) and (°C/°F)

Item 66.4. UV-3C-T Microlog 10 SD (UV-A, UV-B, UV-C)

Item 66.4.1 UV-3C-T Microlog 10 SD (UV-A, UV-B, UV-V)

\*also available in other spectral range combinations upon request

Subject to change without prior notice © 2014-01

UV-DESIGN (Office)  
Triebstrasse 3  
63636 Brachtal  
GERMANY  
Tel.: +49 (0)6053 619824  
Fax: +49 (0)6053 619820

(Office & Workshop) UV-DESIGN  
Fabrikstrasse 12  
63636 Brachtal  
GERMANY  
Tel.: +49 (0)6053 8095431  
Fax: +49 (0)6053 8095433



## UV-3C-T Microlog 10 SD

### Technical Data:

Spectral ranges:	UV-A 315 – 410 nm UV-B 280 – 315 nm UV-C 230 – 280 nm (or UV-V 395 – 445 nm) UV 230 – 410 nm
Temperature range:	32 to 230° F / 0 to 115° C
Max. Power Input*	0 to 2,000 mW/cm <sup>2</sup>
Measuring range:	0 to 2,000 mW/cm <sup>2</sup>
Sampling rate:	0.01 sec (100/sec)
Recording cycle:	90 sec.
Readiness phase:	120 sec.
Display range:	0 to 36,000 mJ/cm <sup>2</sup>
Display:	LCD, 2 x 16 digits
Power source:	3.7 V accu cell
Power consumption:	40 µA
Battery service life:	approx. 1000 re-charges
Dimensions:	140 x 65 x 10 mm (5.5 x 2.4 x 0.4")
Weight:	approx. 8 ounce (250 g)
Operating temperature:	32° to 113° F / 0 to 45° C
Heat protection:	Heat shield on back plate
Base Accuracy:	± 5 %

### Graphic Chart:

With SD Card slot.  
Stores data to an  
SD-Memory card  
For transmission to  
a computer

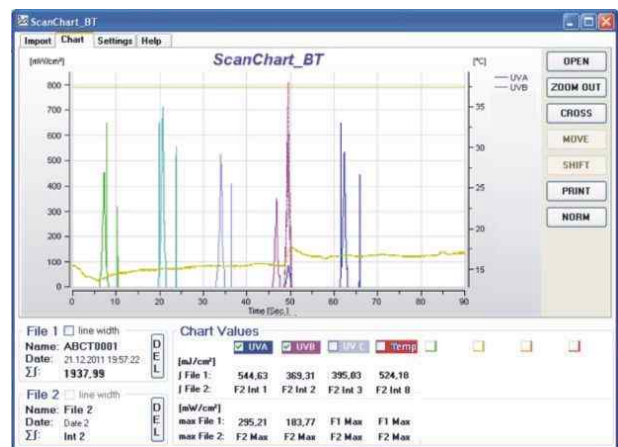

While on the conveyer belt, the UV-3C-T Microlog 10 SD can withstand max. 230° F / 110° C for up to 10 seconds. The temperature of the housing should not exceed 113° F / 45° C.

Because of uneven radiation distribution of the UV light source and different type of construction of the measuring devices by different manufacturers, different readings may appear under the same measurement conditions.

### Calibration:

In order to keep its full function and precision it is recommended to have re-calibration done once per year. Re-calibration will also be necessary after change of battery. PTB traceable calibration with certificate

\*also available up to 20 W/cm<sup>2</sup>, display resolution in relation to maximum power input

\*also available with high-speed sampling rate 0.0007 (1400/sec)